

Fact Sheet

BHA® Filter Bag Fabric Characteristics Chart

We can deliver most any type of filter bag for your baghouse, regardless of OEM design and system conditions. The charts below specify the most popular styles, fabrics and finishes, and the conditions they are most suited to handle.

Fabrics	Polypropylene	Acrylic	Polyester	PPS	Aramid	P84†	Fiberglass	PTFE Felt	Cellulose/ Polyester Blend
Maximum Continuous Operating Temperature	170° F (77° C)	265° F (130° C)	275° F (135° C)	375° F (190° C)	400° F (204° C)	500° F (260° C)	500° F (260° C)	500° F (260° C)	200° F (93° C)
Abrasion	Excellent	Good	Excellent	Good	Excellent	Fair	Fair	Good	Good
Energy Absorption	Good	Good	Excellent	Good	Good	Good	Fair	Good	Good
Filtration Properties	Good	Good	Excellent	Excellent	Excellent	Excellent	Fair	Fair	Good
Moist Heat	Excellent	Excellent	Poor	Good	Good	Good	Excellent	Excellent	Fair
Alkalines	Excellent	Fair	Fair	Excellent	Good	Fair	Fair	Excellent	Poor
Mineral Acids	Excellent	Good	Fair	Excellent	Fair	Good	Poor	Excellent	Poor
Oxygen (15%+)	Excellent	Excellent	Excellent	Poor	Excellent	Excellent	Excellent	Excellent	Excellent

	Finishes	Finish Purpose	Available For
Non-fiberglass	BHA Preveil ePTFE Membrane	For capture of fine particulate, improved filtration efficiency, cake release and airflow capacity	Polyester, Aramid, Acrylic, Polypropylene (felt and woven), P84, PPS, Teflon/PTFE
	Singe	Recommended for improved cake release	Polyester, Polypropylene, Acrylic, Aramid, PPS, P84 (felts)
	Glaze/Eggshell	Provides short-term improvements for cake release (may impede airflow)	Polyester, Polypropylene (felts)
	Silicone	Aids initial dust cake development and provides limited water repellency	Polyester (felt and woven)
	Flame Retardant	Retards combustibility (not flame-proof)	Polyester, Polypropylene (felt and woven)
	Acrylic Coatings (Latex Base)	Improved filtration efficiency and cake release (may impede airflow in certain applications)	Polyester and Acrylic felts
	PTFE Penetrating Finishes	Improved water and oil repellency; limited cake release	Polyester, Aramid (felt), PPS

	Finishes	Finish Purpose	Applications
Fiberglass	BHA Preveil ePTFE Membrane	For capture of fine particulate, improved filtration efficiency, cake release and airflow capacity	Cement/lime kilns, incinerators, coal-fired boilers, cupola, ferrosilica/alloy, furnace
	Silicone, Graphite, ePTFE	Protects glass yarns from abrasion, adds lubricity	For non-acid conditions, primarily for cement and metal foundry applications
	Acid Resistant	Helps shield glass yarn from acid attack to extend life	Coal-fired boilers, carbon black, incinerators, cement, industrial and boiler applications
	ePTFE	Provides enhanced fiber-to-fiber resistance to abrasion and limited chemical resistance	Industrial and utility base load boilers under mild pH conditions, cement and lime kilns
	Blue Max CRF-70*	Provides improved acid resistance and reduces fiber-to-fiber abrasion, resistant to alkaline attack, improved fiber encapsulation	Coal-fired boilers (high and low sulfur) for peak load utilities, fluidized bed boilers, carbon black, incinerators

The information above is provided as a general guideline. Varying sets of conditions may affect performance. Other specialty finishes may be available.

*Trademarks are property of their respective owners.

© 2018 Parker Hannifin Corporation



Parker Hannifin Corporation
Industrial Gas Filtration and Generation Division
 11501 Outlook Street, Suite 100
 Overland Park, KS 66211 USA
 p: 800.821.2222 | f: 816.353.1873
 e: filtration@parker.com
www.BHA.com

ENGINEERING YOUR SUCCESS.

BHA® Fabric Filter Bags & Cages

Properly engineered cages help protect your filter investment

A well-built cage is critical to the overall performance and durability of your filter bag. Parker Hannifin cages feature evenly spaced rings and wires, with a rounded bottom pan (never cringed) to help ensure proper filter fit. Choose from a number of materials to serve your specific application:

- Low carbon steel (bright basic wire)
- Galvanized low carbon steel
- Type 304 stainless steel
- Type 316 stainless steel


Rigid Wire Cages

Standard and specialty cage tops are available. All bottom pans are welded to the inside to reduce abrasion. Options for rigid wire cages include:

- 11 gauge wire diameter — .1205 in. (3.1 mm)
- 9 gauge wire diameter — .148 in. (3.8 mm)
- 7 gauge wire diameter — .177 in. (4.5 mm)
- 4 to 7.375 in. (101.6 mm to 187.3 mm) cage diameter
- Customized number of vertical wires (8, 10, 12, 20)
- Customized ring spacing — standard is 6 in. or 8 in. (152.4 mm or 203.2 mm)

Two-Piece Cage


For baghouses with low headroom in the clean air plenum, we offer a two-piece cage (as shown in photo at right). This style allows for cage installation and removal in reduced spaces.




Omni cage detachable top.

Omni Cage

The Omni cage top was developed to facilitate snap-band bag removal. It has a detachable top which allows removal of the cage top first. With the cage top no longer blocking access to the snap-band, the band can be snapped loose from the tubesheet, and the bag and cage body lifted out easily.

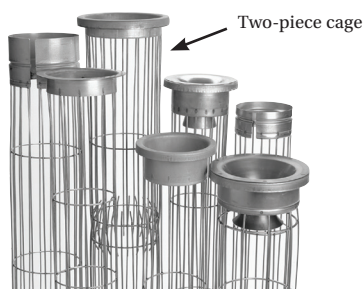

Two-piece cage



Evenly spaced rings and wires

Rounded bottom pan

Cages are a critical baghouse component for optimum bag performance and durability.

Technology for reverse air cleaning systems

We offer dozens of parts for reverse air systems including durable clamps, tensioning assemblies, and engineered tubesheet solutions (with and without thimbles).



Parker Hannifin can design any type of filter bag or element to enhance the performance of your dust collector.